


# XTENDER HRC 555 Headed Rebar

TYPE 555

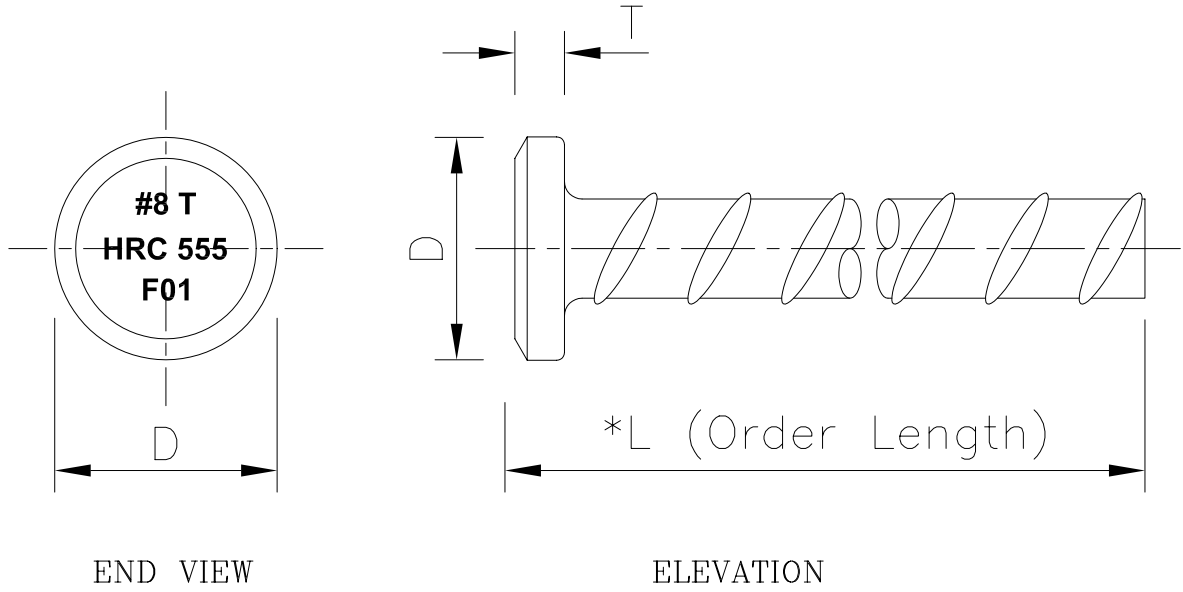

\*L = ORDERING LENGTH is available from 8" to 80'.  
All data subject to change without prior notice.

Heads are fabricated on one or both ends of reinforcing bar.

Made according to ASTM A970.

NOM. PROPERTIES			A615 Gr60 (lbs)		A615 Gr75 (lbs)		A706 (lbs)		HEAD DIMENSION (in)	
Bar NO.	Dia. inch	Areq inch <sup>2</sup>	MIN YEILD STRENGTH	MIN TENSILE STRENGTH	MIN YEILD STRENGTH	MIN TENSILE STRENGTH	MIN YEILD STRENGTH	MIN TENSILE STRENGTH	D (dia)	T (min.thk.)
#4	0.500	0.20	12,000	18,000	-	-	12,000	16,000	1.14	0.25
#5	0.625	0.31	18,600	27,900	-	-	18,600	24,800	1.42	0.31
#6	0.750	0.44	26,400	39,600	-	-	26,400	32,800	1.69	0.38
#7	0.875	0.60	36,000	54,000	-	-	36,000	48,000	1.97	0.44
#8	1.00	0.79	47,400	71,100	59,250	79,000	47,400	63,200	2.25	0.50
#9	1.128	1.00	60,000	90,000	75,000	100,000	60,000	80,000	2.56	0.56
#10	1.270	1.27	76,200	114,300	95,250	127,000	76,200	101,600	2.87	0.64
#11	1.410	1.56	93,600	140,400	117,000	156,000	93,600	124,800	3.19	0.70
#14	1.693	2.25	135,000	202,500	168,750	225,000	135,000	180,000	3.82	1.02

:R/DRAWINGS 01/HRC STANDARDS/HRC 555.DWG 12/06/10



**HEADED REINFORCEMENT CORP.**  
11200 Condor Avenue • Fountain Valley, CA 92708  
Tel: (714) 557-1455 • Fax: (714) 557-4460